


Alan Gómez Hdez.

Gpo. 1125

## TAREA 13

### Ejercicio 1

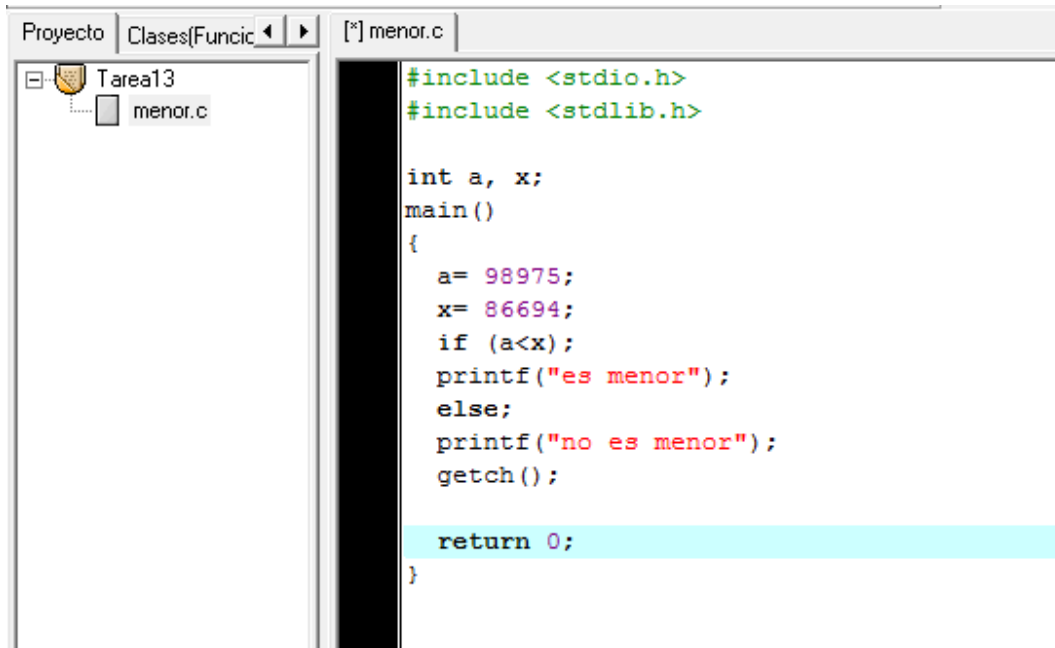

The screenshot shows a code editor window with a project named 'Tarea13' and a file named 'menor.c'. The code in the editor is as follows:

```
#include <stdio.h>
#include <stdlib.h>

int a, x;
main()
{
    a= 98975;
    x= 86694;
    if (a<x);
    printf("es menor");
    else;
    printf("no es menor");
    getch();


    return 0;
}
```



The screenshot shows a terminal window with the output of the program:

```
no es menor_
```


## Ejercicio 2

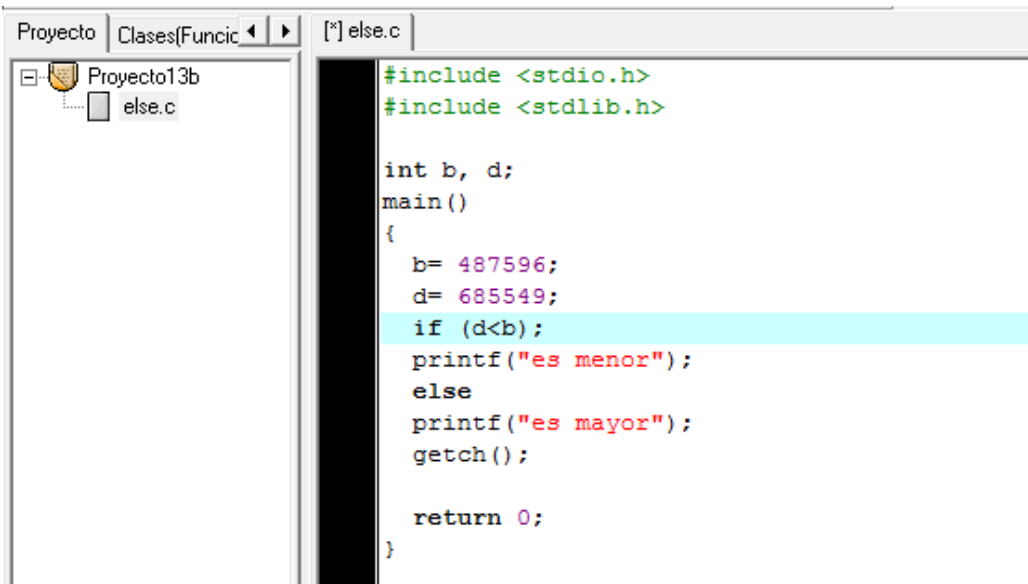


```
Proyecto Clases(Funcion) [*] else.c
Projecto13b
  else.c
#include <stdio.h>
#include <stdlib.h>

int b, d;
main()
{
    b= 487596;
    d= 685549;
    if (d<b);
    printf("es menor");
    else
    printf("es mayor");
    getch();

    return 0;
}
```

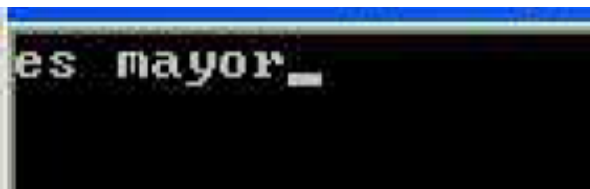


```
es mayor_
```

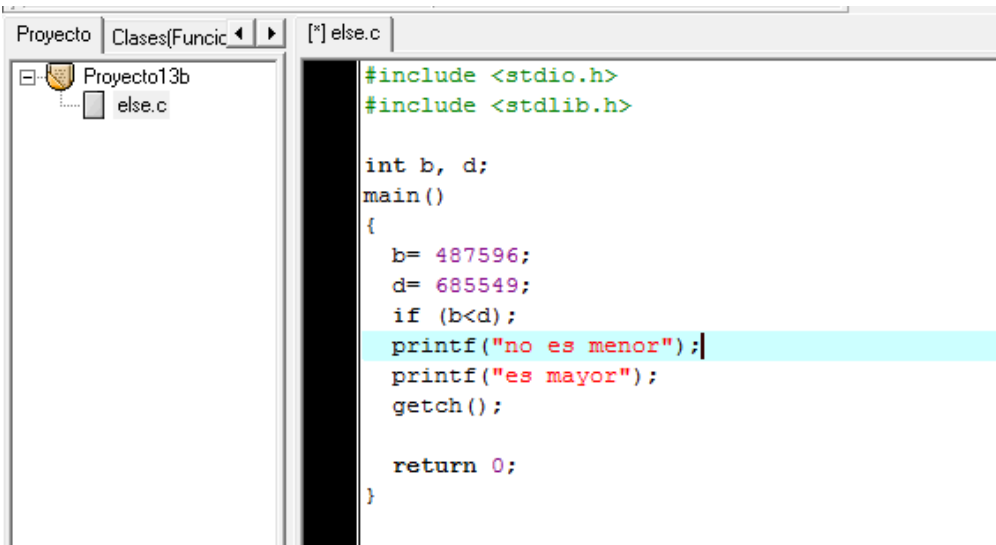

```
Proyecto Clases(Funcion) [*] else.c
Projecto13b
  else.c
#include <stdio.h>
#include <stdlib.h>

int b, d;
main()
{
    b= 487596;
    d= 685549;
    if (b<d);
    printf("no es menor");
    printf("es mayor");
    getch();

    return 0;
}
```

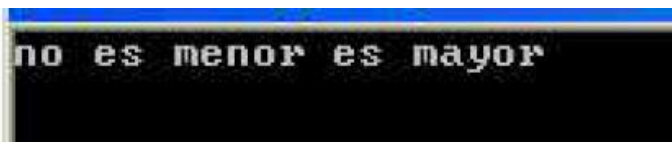

```
no es menor es mayor
```